


NAME:	TYPE:	DOWNLIGHT
SPEC.:	DTM.:	
MFR.:	SUB.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			Eff: 80.54 lm/W
MODEL		I _{max} (cd)	1498	S/MH (C0/180)	0.95
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)	0.94
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1599.4	η UP, DN (C0-180)	0.4, 42.4
NOMINAL FLUX (lm)	1599.38	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.6, 56.7
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	219.5	η down (%)	99.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

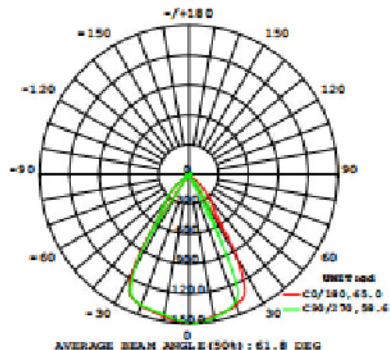

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

