

LUMINAIRE PHOTOMETRIC TEST REPORT


High-bay(UFO)

Test:U:230.4V I:0.6668A P:151.8W PF:0.9877 Lamp Flux:24450.2xl lm

NAME: With lifuD driver	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR :	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL:VBL50W-P3-(4000K-90°)		Imax(cd)	12673	S/MH (C0/180)	1.24
NOMINAL POWER (W)	152	LOR (%)	104.5	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	232	TOTAL FLUX(lm)	25549	η UP, DN (C0-180)	1.4, 52.5
NOMINAL FLUX(lm)	24450.2	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.4, 49.2
LAMPS INSIDE	1	η up (%)	2.8	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	231.6	η down (%)	101.7	CIBSE SHR MAX	1.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

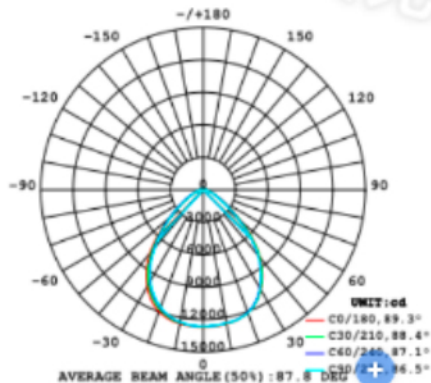

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

