


595x595 MICRO-PRM 840 Backlit panel

DATA OF LAMP		Imax (cd)			
MODEL		EFFICIENCY (%)	100.0	S/MH (C90/270)	1.23
NOMINAL POWER (W)	42	TOTAL FLUX (lm)	4991.4	Voltage (V)	230.1
RATED VOLTAGE (V)	230	EFFICIENCY (lm/W)	119.9	Current (A)	0.186
NOMINAL FLUX (lm)	4991.4	η up (%)	0.6	Power (W)	41.62
LAMPS QUANTITY	1	η down (%)	99.4	Power Factor (PF)	0.972
TEST VOLTAGE (V)	230.1	Effective Flux (lm)	0.0	EEI	0.000

LUMINOUS INTENSITY DISTRIBUTION

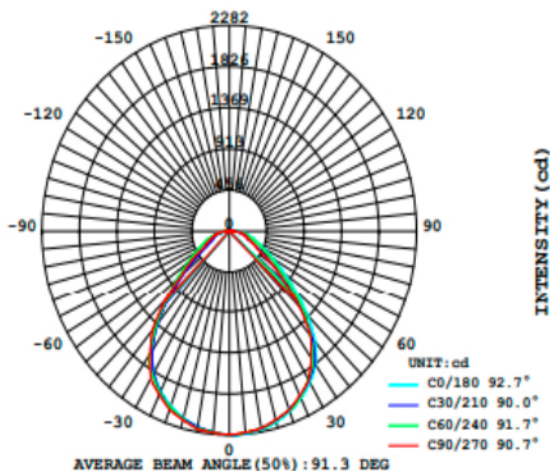

LUMINOUS INTENSITY DISTRIBUTION

